













Call us on +44 121 725 1533

info@ncsplants.com www.ncsplants.com NCS Ltd, 636 Bristol Road, Selly Oak, Birmingham B29 6BJ



Mobicrete Mobile self-erected **Ready Mix Concrete Plant**



The plant design to produce 3M³ every 90 sec with a total up to 100M³ per hour.













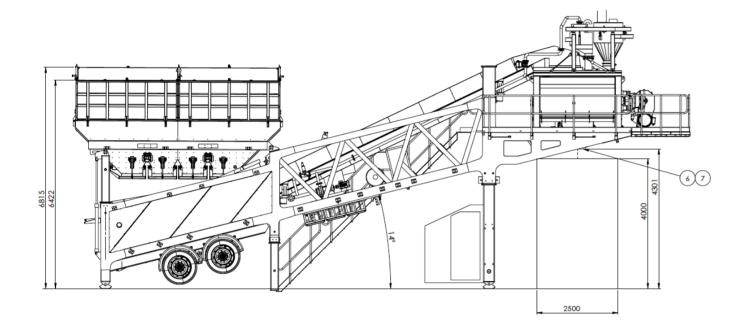

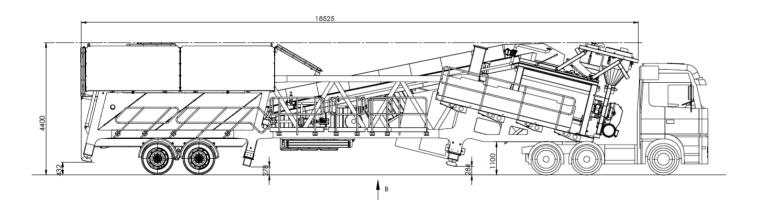



100M³/ Hour compact concrete

- 4 AGGREGATE STORAGE BINS Total Capacity 40m3
- 8 Discharge gates operate by 8 pneumatic cylinders.
- AGGREGATE WEIGHING: Capacity 6m3
- BATCH CONVEYOR: 800mm wide. Chevron belt.
- SICOMA-OMG MAO 4000/3000 Twin Shaft Mixer.
- CEMENT WEIGHING: Capacity 1200 Kgs.
- WATER TANK: 600 Litres capacity.
- WATER: Metered through 76mm line.
- ADMIX SYSTEM: 1 or 2 metered lines.
- COMPRESSOR: 5.5 HP mounted on 500 litre receivers.
- WASH DOWN: High pressure pump and lance.
- CONTROL SYSTEM: Practicon C-PAK Plus or Command ALKON.
- HYDRAULIC JACKING: Motorised Powerpack System.
- Fold away walkways, steps etc. for fast & easy removal.
- Moved by one truck compatible with UK highway regulation.
- Fully equipped for Road transport, on tandem axles.
- Very fast installation. No crane. Requires two operators.
- Completely self-erecting via onboard hydraulics and power system.